


Composite Cable for **16HD-A** connector

Composite Signal Cable containing:
 1-RG59/U COAX with #20 AWG Stranded Center Conductor
 1-#18 AWG TWISTED PAIR WITH DRAIN IN FOIL SHIELD
 1-#18 AWG TWISTED PAIR WITH DRAIN IN FOIL SHIELD
 2-#18 AWG AUXILIARY CABLES
 4-#16 AWG AUXILIARY CABLES
 5-#14 AWG POWER CABLES
 CABLE LENGTH PER ASSEMBLY: **AS REQUESTED**

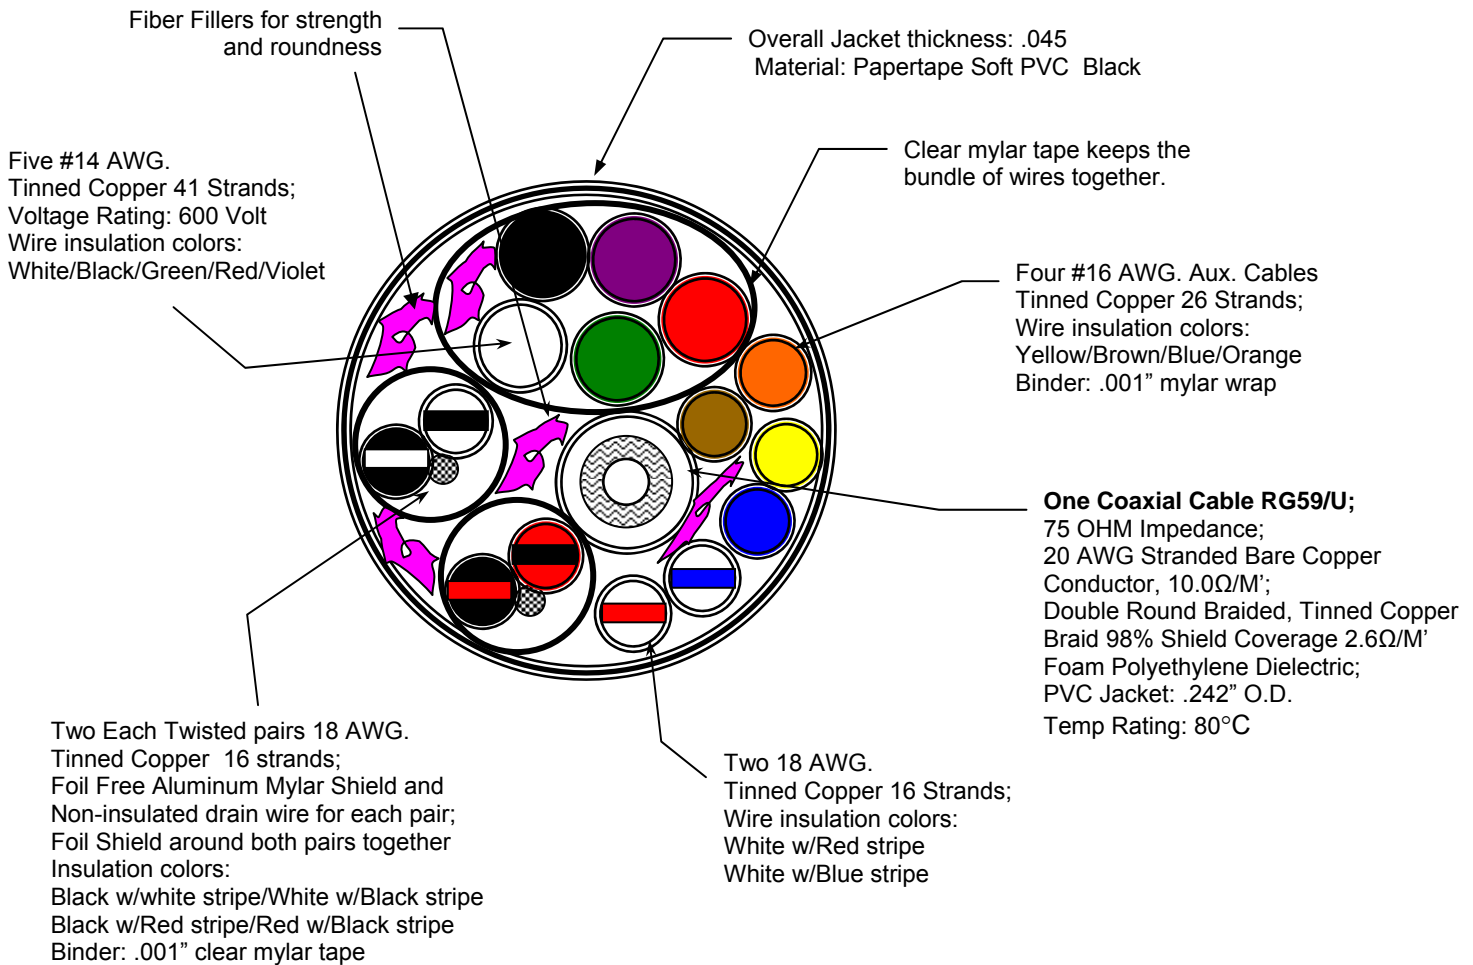

ADDITIONAL CABLE SPECS:

- VOLTAGE RATING FOR 14 AWG WIRE INSULATION: 600 V.
- **UL** and **CSA** approved cable.
- PART NUMBER '**663-224-RG59-16**', E24546 **UL** AWM STYLE 2464, **CSA** LL15758 AWM A/II 90°C 300V FT1 -4/C 16 AWG + 2/PR 18 AWG + 2/C 18 AWG +5/C 14AWG + 1/C 20 AWG 80*c 300V VW-1 (PRINTED ON OUTSIDE OF JACKET).
- JACKET MATERIAL: .045 thick soft PVC
- FILLERS A MUST AND WRAPS AS REQUIRED.